


# FlexiForce™ Standard Model A301

## Actual size of sensor

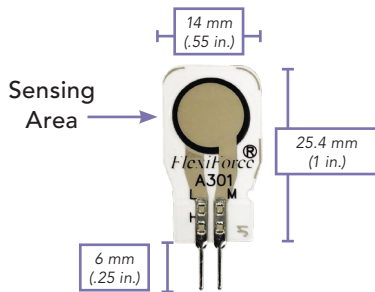

The A301 design is optimized for high volume manufacturing and is ideal for embedding into products and applications. This sensor is available in low and high quantities off-the-shelf, ideal for an easy proof of concept. The A301 can be used with our test & measurement, prototyping, and embedding electronics, including the FlexiForce Sensor Characterization Kit, FlexiForce Prototyping Kit, FlexiForce Quickstart Board, and the ELF™ System\*. You can also use your own electronics, or multimeter.

## Benefits

- Small size is ideal for prototyping and integration
- Available with Enhanced Stability Series (ESS) pressure sensitive ink for high-temperature and high-humidity environments
- Thin and flexible
- Easy to use

✓ ROHS COMPLIANT

\* Sensor will require an adapter/extender to connect to the ELF System. Contact your Tekscan representative for assistance.

\*\*Length does not include pins. Please add approximately 6 mm (0.25 in.) for pin length for a total length of approximately 32 mm (1.25 in.).

## Physical Properties

|              |                              |
|--------------|------------------------------|
| Thickness    | 0.203 mm (0.008 in.)         |
| Length       | 25.4 mm (1 in.)**            |
| Width        | 14 mm (0.55 in.)             |
| Sensing Area | 9.53 mm (0.375 in.) diameter |
| Connector    | 2-pin Male Square Pin        |
| Substrate    | Polyester                    |
| Pin Spacing  | 2.54 mm (0.1 in.)            |

|                         | Typical Performance             | Evaluation Conditions                             |
|-------------------------|---------------------------------|---|
| Linearity (Error)       | < ±3% of full scale             | Line drawn from 0 to 50% load                     |
| Repeatability           | < ±2.5%                         | Conditioned sensor, 80% of full force applied     |
| Hysteresis              | < 4.5% of full scale            | Conditioned sensor, 80% of full force applied     |
| Drift                   | < 5% per logarithmic time scale | Constant load of 111 N (25 lb)                    |
| Response Time           | < 5µsec                         | Impact load, output recorded on oscilloscope      |
| Operating Temperature   | -40°C - 60°C (-40°F - 140°F)    | Convection and conduction heat sources            |
| Acceptance Criteria     | ±40% sensor-to-sensor variation | Output considered at test pressure                |
| Durability              | ≥ 3 million actuations          | Perpendicular load, room temperature, 22 N (5 lb) |
| Temperature Sensitivity | 0.36%/°C (± 0.2%/°F)            | Conductive heating                                |

\*\*\*All data above was collected utilizing an Op Amp Circuit (shown on the next page). If your application cannot allow an Op Amp Circuit, visit [www.tekscan.com/flexiforce-integration-guides](http://www.tekscan.com/flexiforce-integration-guides), or contact a FlexiForce Applications Engineer.

## Standard Force Ranges as Tested with Circuit Shown

4.4 N (0 - 1 lb)


111 N (0 - 25 lb)

445 N (0 - 100 lb)<sup>†</sup>

<sup>†</sup>This sensor can measure up to 4,448 N (1,000 lb). In order to measure higher forces, apply a lower drive voltage (-0.5 V, -0.25 V, etc.) and reduce the resistance of the feedback resistor (1kΩ min.). To measure lower forces, apply a higher drive voltage and increase the resistance of the feedback resistor.

Sensor output is a function of many variables, including interface materials. Therefore, Tekscan recommends the user calibrate each sensor for the application.

### Recommended Circuit

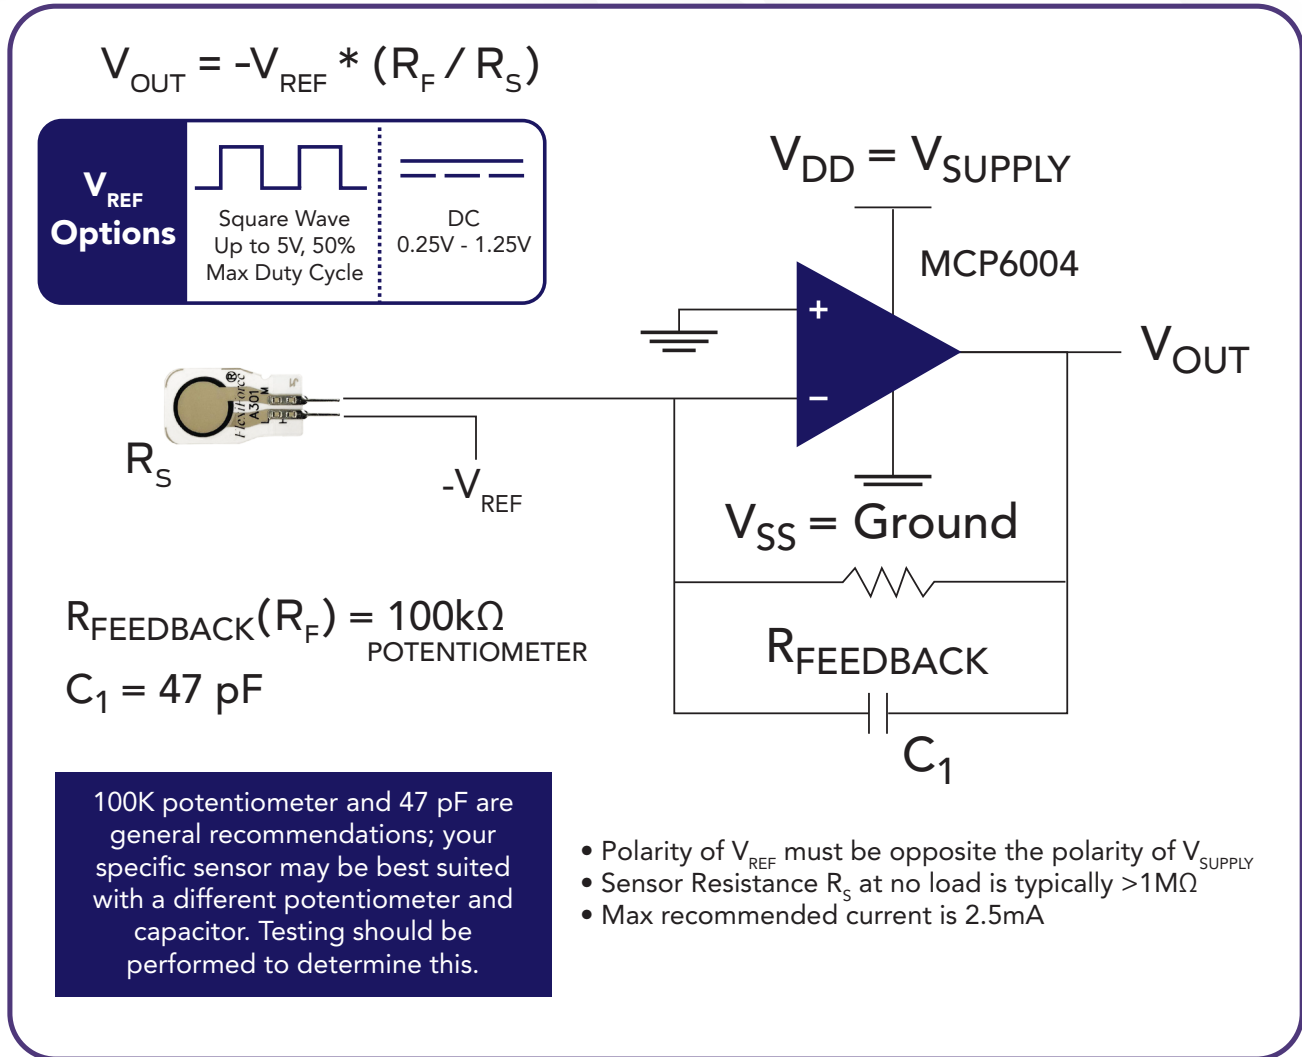

PURCHASE TODAY ONLINE AT [WWW.TEKSCAN.COM/STORE](http://WWW.TEKSCAN.COM/STORE)



©Tekscan Inc., 2020. All rights reserved. Tekscan, the Tekscan logo, and FlexiForce are trademarks or registered trademarks of Tekscan, Inc.

+1.617.464.4283

| 1.800.248.3669

| [info@tekscan.com](mailto:info@tekscan.com)

| [www.tekscan.com/flexiforce](http://www.tekscan.com/flexiforce)