

Model 264

Very Low Differential Pressure Transducer

With millions of sensors installed world wide, Setra's 264 is the "standard" for low differential pressure measurement in HVAC building automation. The 264 very low differential pressure transducer uses a dead-ended stainless steel welded capacitive sensing element that requires minimal amplification and delivers excellent accuracy and longterm stability in critical installations. The 264 has a 3 year, unconditional warranty, giving the end-user peace of mind well beyond the initial commissioning phase and guarantees performance well after the BAS warranty. The 264 utilizes a robust design that offers brass barbed fittings, and an optional conduit cover for easy and consistent installation.



The Industry "Standard" Pressure Transducer

The 264 has been a consistent and trusted HVAC sensor for over two decades. The reputation of reliability and quality with exceptional delivery time has helped the 264 remain the trusted choice for any low differential pressure applications.

Convenient Installation

The 264 is available in both a wall and conduit versions providing the installer with flexible mounting options. The base mount allows the sensor to be installed anywhere, allowing for a simple installation.

The Setra Sensor

The core technology of the 264 is the all stainless steel capacitive sensing element. Setra designs and manufactures all of their sensing elements resulting in full control over the process and quality of every single sensor. The welded dead-ended capacitive sensors requires minimal amplification and delivers excellent accuracy and longterm stability. Setra's technology has been used in over 8 million installations and has the highest field acceptance rate in the industry.

- Industry Standard
- $\pm 0.25\%$, $\pm 0.4\%$, $\pm 1\%$ FS Accuracy
- 3 Year, Unconditional Warranty

Model 264 Features:

- Up to 10 PSI Overpressure (Range Dependent)
- Installation Time Minimized w/ Mounting Options
- Reverse Wiring Protection
- Internal Regulation Permits Use with Unregulated DC Power Supplies
- Fire Retardant Case (UL 94 V-0 Approved)
- CE & RoHS Compliant

Applications:

- Heating, Ventilating and Air Conditioning
- Energy Management Systems
- Variable Air Volume and Fan Control (VAV)
- Environmental Pollution Control
- Lab & Fume Hood Control

Model 264

Very Low Differential Pressure Transducer



ORDERING INFORMATION



2	6	4	1	-					-			-			-	
Model	Range Code				Output		Electrical Termination		Accuracy ¹							
2641 = Model 264	Unidirectional		Bidirectional		11	4-20 mA	T1	Terminal Strip	C	±1% FS						
	0R1WD	0 to 0.1"W.C.	R05WB	±0.05"W.C.	2D	0-5 VDC	A1	1/2 in. Conduit Enclosure	E	±0.4% FS						
	R25WD	0 to 0.25"W.C.	0R1WB	±0.1"W.C.					F	±0.25% FS						
	0R5WD	0 to 0.5"W.C.	R25WB	±0.25"W.C.					G	±1% FS						
	001WD	0 to 1.0"W.C.	0R5WB	±0.5"W.C.												
	1R5WD	0 to 1.5"W.C.	001WB	±1"W.C.												
	2R5WD	0 to 2.5"W.C.	1R5WB	±1.5"W.C.												
	003WD	0 to 3.0"W.C.	2R5WB	±2.5"W.C.												
	005WD	0 to 5.0"W.C.	005WB	±5.0"W.C.												
	010WD	0 to 10.0"W.C.	7R5WB	±7.5"W.C.												
	015WD	0 to 15.0"W.C.	010WB	±10.0"W.C.												
	025WD	0 to 25.0"W.C.	025WB	±25.0"W.C.												
	050WD	0 to 50.0"W.C.	050WB	±50.0"W.C.												
	100WD	0 to 100.0"W.C.														

1. Optional Accuracies E, F, G include Calibration Certificate

Ordering Example: 26412R5WD11T1C= Model 264, 0 to 2.5 in. W.C. Range, 4 to 20 mA Output, Terminal Strip Electrical Connection, and ±1% Accuracy

GENERAL SPECIFICATIONS

DIMENSIONS

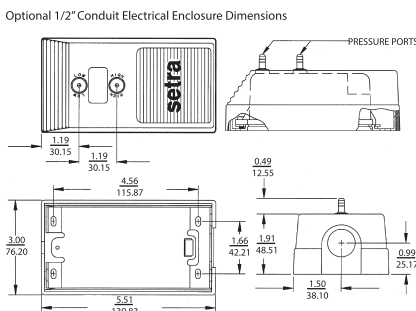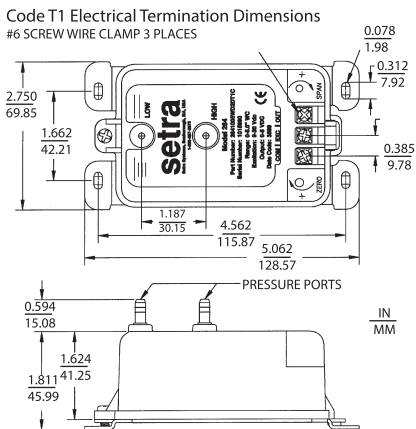

Performance Data			Physical Description	
	Standard	Optional	Case	
Accuracy RSS ¹ (at constant temp)	±1.0% FS	±0.4% FS ±0.25% FS	Fire-Retardant Glass Filled Polyester (UL 94 V-O Approved)	Screw Terminal Strip
Non-Linearity, BFSL	±0.96% FS	±0.38% FS ±0.22% FS	Electrical Connection	4 screw holes on removable zinc plated steel base (designed for 2.75" snap track)
Hysteresis	0.10% FS	0.10% FS 0.10% FS	Mounting	3/16" O.D. barbed brass for 1/4" push on tubing
Thermal Effects			Pressure Fittings	3/16" O.D. barbed brass for 1/4" push on tubing
Compensated Range °F (°C)	0 to +150 (-18 to +65)		Zero and Span Adjustments	Accessible on top of case
Zero/ Span Shift %FS/100°F(50°C)	±0.033 (±0.06)		Weight (approx.)	10 Ounces
Maximum Line Pressure	10 PSI		Electrical Data (Voltage)	
Overpressure	Up to 10 PSI (Range Dependent)		Circuit	3-Wire (Com, Out, Exc)
Long Term Stability	0.5% FS/1YR		Excitation/ Output ⁴	9 to 30 VDC / 0 to 5 VDC ^{5,6}
Environmental Data			Output Impedance	100 ohms
Operating Temperature ³ °F (°C)	0 to +175 (-18 to +79)		Output ²	4 to 20 mA ^{8,9}
Storage Temperature °F (°C)	-65 to +250 (-54 to +121)		External Load	0 to 800 ohms
Pressure Media			Minimum Supply Voltage (VDC)	9 + 0.02 x (resistance of receiver plus line)
Clean air or similar non-conducting gases.			Maximum Supply Voltage (VDC)	30 + 0.004 x (resistance of receiver plus line)
Position Effect			Bidirectional output at zero pressure	12 mA ^{8,9}
Unit is factory calibrated at 0g effect in the vertical position			Range	%FS/G
			0.1 in. WC	2.3
			0.25 in. WC	1
			0.5 in. WC	0.5
			1.0 in. WC	0.3
			2.5 in. WC	0.2
			10 in. WC	0.15

¹ RSS of Non-Linearity, Hysteresis, and Non-Repeatability.
² Units calibrated at nominal 70° F. Maximum thermal error computed from this datum.
³ Operating temperature limits of the electronics only.
 Pressure media temperatures may be considerably higher.
⁴ Calibrated into a 50K ohm load, operable into a 5000 ohm load or greater.
⁵ Zero output factory set to within ±50mV (±25 mV for optional accuracies).
⁶ Span (Full Scale) output factory set to within ±50mV. (±25 mV for optional accuracies).
⁷ Calibrated at factory with a 24 VDC loop supply voltage and a 250 ohm load.
⁸ Zero output factory set to within ±0.16mA (±0.08 mA for optional accuracies).
⁹ Span (Full Scale) output factory set to within ±0.16mA (±0.08 mA for optional accuracies).

Specifications subject to change without notice.