


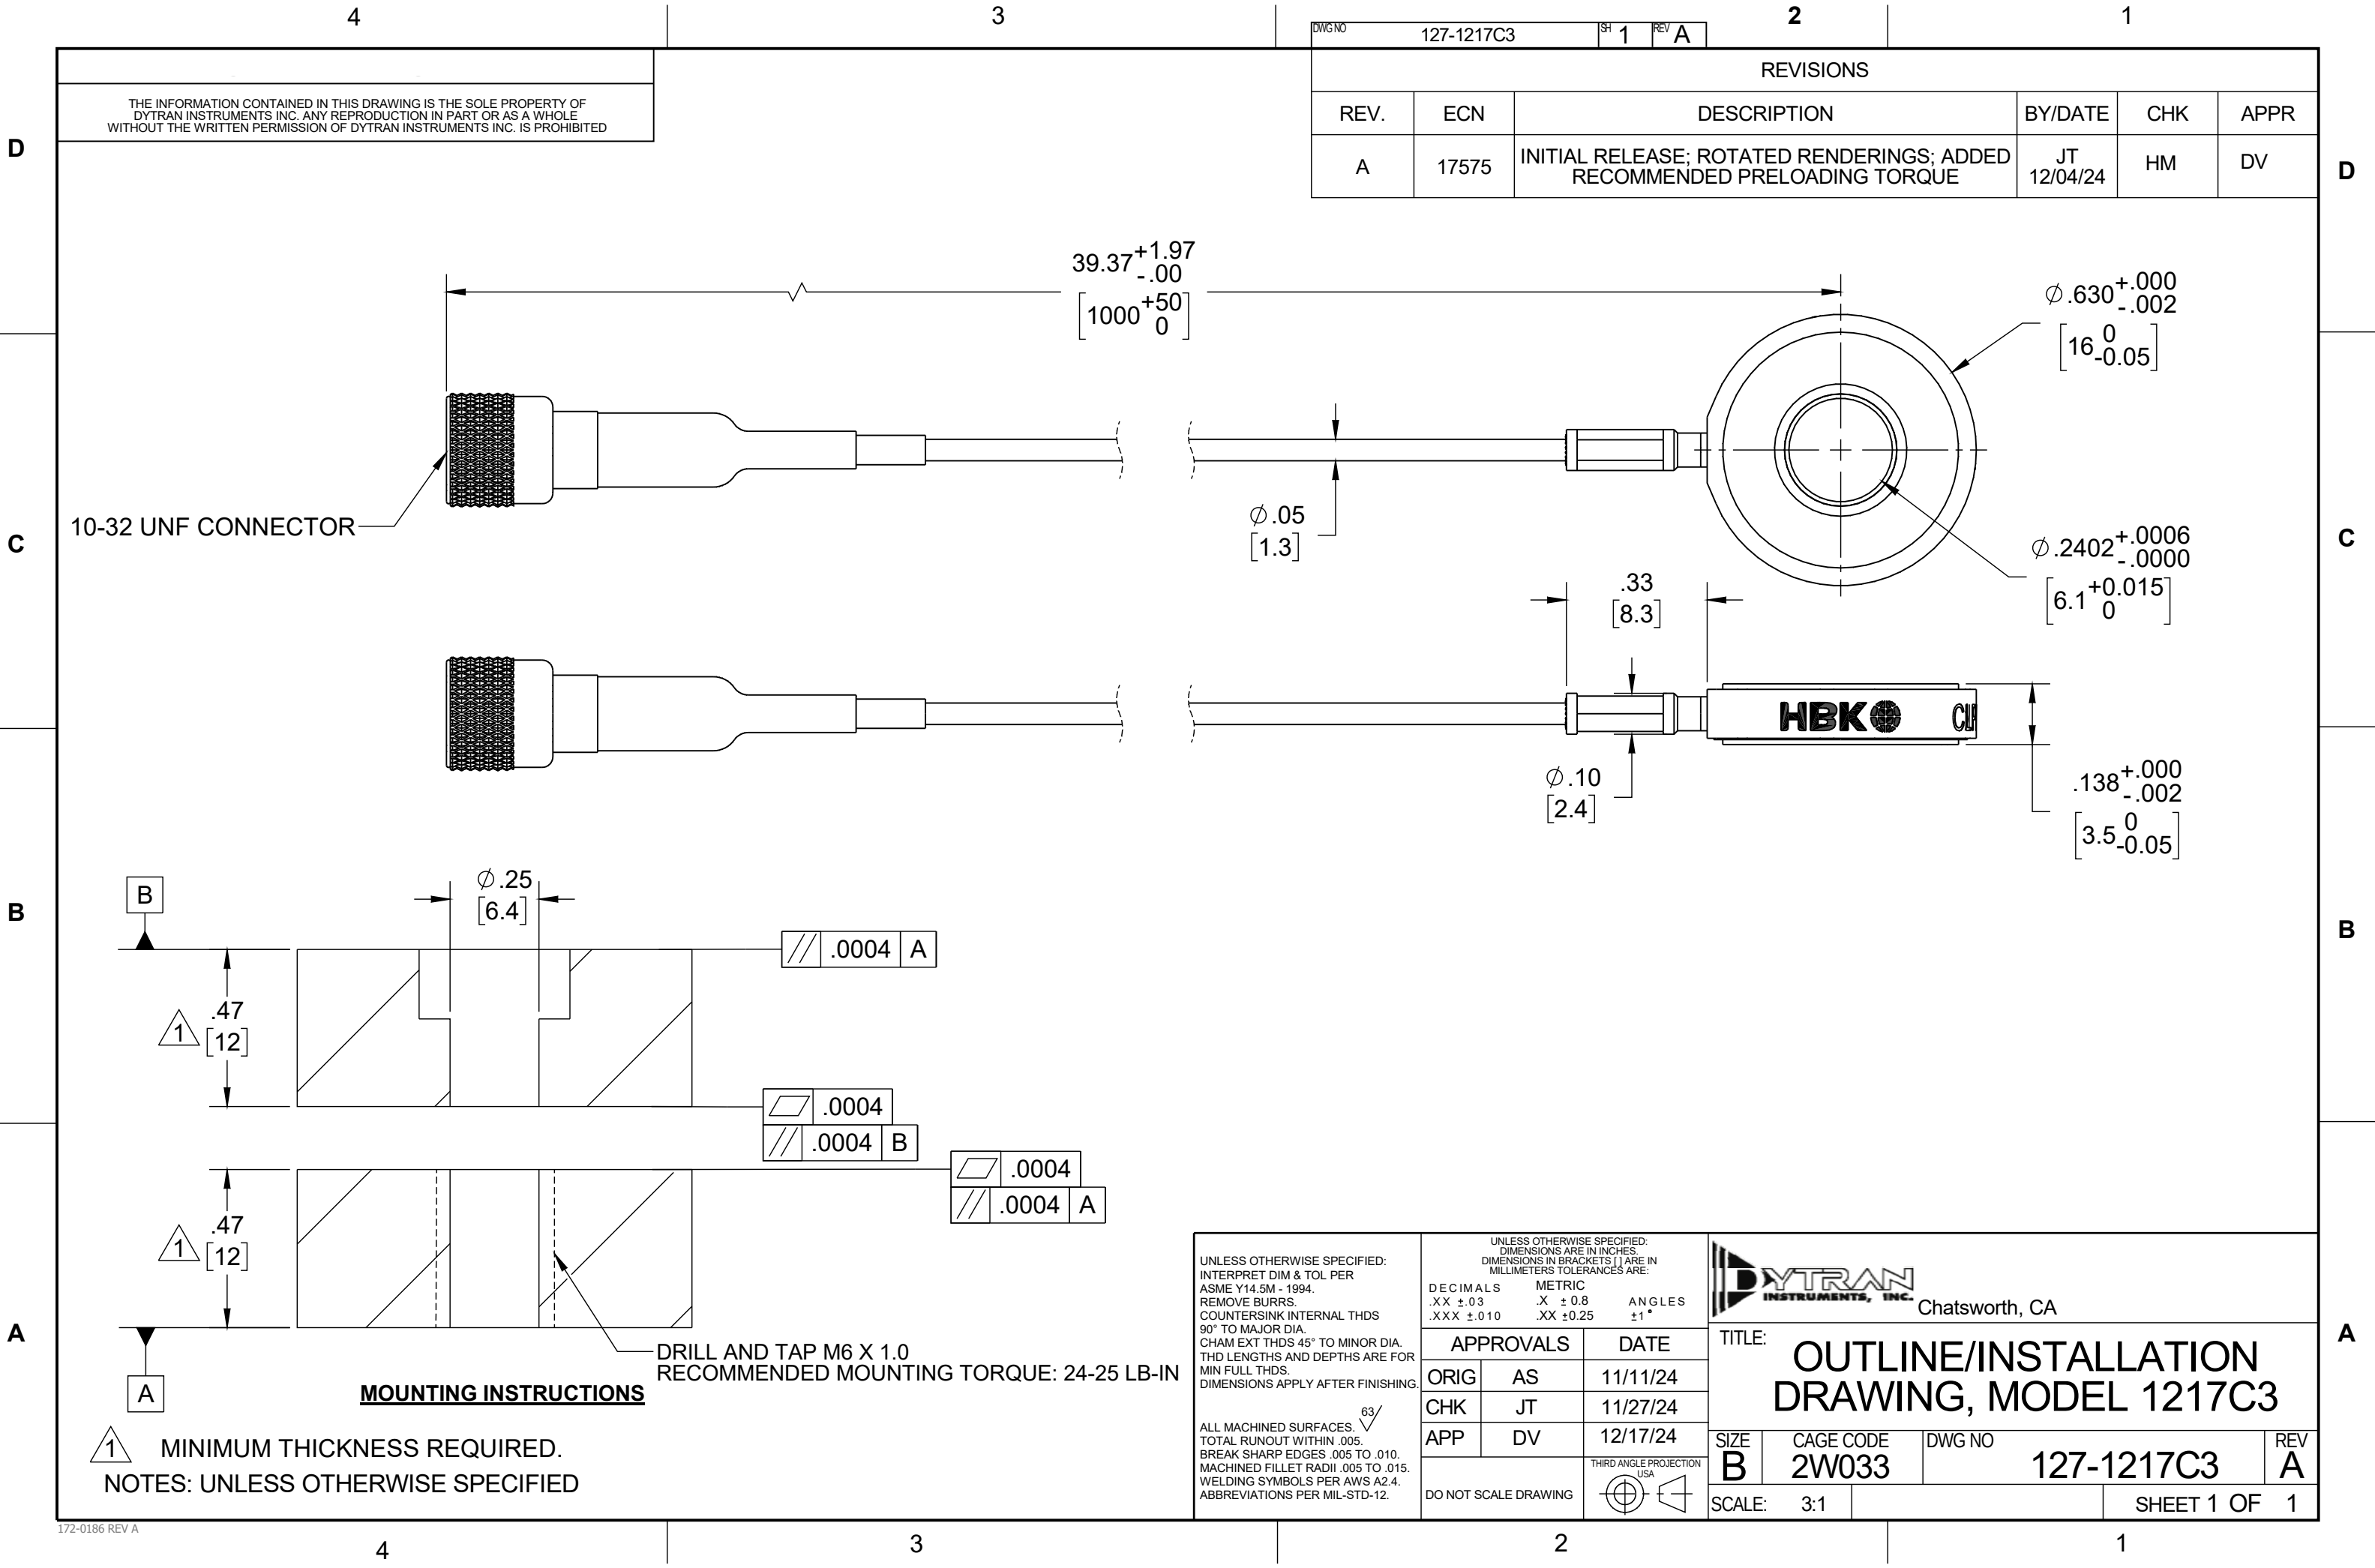

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

DWGNO		127-1217C3		SH	1	REV	A	2		1	
REVISIONS											
REV.	ECN	DESCRIPTION						BY/DATE	CHK	APPR	
A	17575	INITIAL RELEASE; ROTATED RENDERINGS; ADDED RECOMMENDED PRELOADING TORQUE						JT 12/04/24	HM	DV	

10-32 UNF CONNECTOR

HBK

CU

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994.
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES. $\sqrt{\text{ }}$
TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE:		
DECIMALS	METRIC	ANGLES
.XX ±.03	.X ±.8	±1°
.XXX ±.010	.XX ±0.25	
APPROVALS		DATE
ORIG	AS	11/11/24
CHK	JT	11/27/24
APP	DV	12/17/24
DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION USA



Chatsworth, CA

TITLE: **OUTLINE/INSTALLATION
DRAWING, MODEL 1217C3**

SIZE	CAGE CODE	DWG NO	REV
B	2W033	127-1217C3	A
SCALE: 3:1		SHEET 1 OF 1	

MODEL NUMBER		PERFORMANCE SPECIFICATION				DOC NO.	
1217C3						PS1217C3	
		RING FORCE TRANSDUCER				REV A, ECN17575, 12/04/24	
							