

optris CTi LTeX for applications in hazardous areas



Features:

- Two-piece measuring system with active electronic for evaluation and passive IR receiver (sensing head)
- CTi LTeX sensing head can be installed as passive element in hazardous areas
- Energy limitation with appropriate zener barriers (STAHL) with approval for zone 1 (PTB 01 ATEX 2053/ E II (1/2) GD [Ex ia/ib] IIC/IIB)
- Exchangeable Sensing Heads with individual calibration Code as Head ID

Technical data (zener barriers) ¹⁾

Approvals: Type 9002/22-032-300-111 Type 9002/11-137-029-001	Europe (CENELEC): for zone 1: PTB 01 ATEX 2053X for zone 2: PTB 01 ATEX 2054X IECEx PTB 08.0057X
	USA: UL E81680V1S3
	Canada: CSA 1284580 (LR 43394)
Classes, Divisions and Groups	Europe (CENELEC): for zone 1: E II (1/2) GD [Ex ia/ib] IIC/IIB for zone 2: E II 3 GD EEx nA II T4
	USA: I.S. circuits for: class I, II, III, division 1, groups A, B, C, D, E, F, G I.S. circuits for: class I, zone 0, group IIC class I, division 2, groups A, B, C, D class I, zone 2, group IIC
	Canada: I.S. circuits for: class I, groups A, B, C, D; class II, groups E, F, G class III class I, division 2, groups A, B, C, D class I, zone 2, groups IIC
Installation	in zone 2, division 2 and in safe area
Environmental rating	IP 67
Ambient temperature	-20 °C ... 60 °C

Concept/Scope of delivery

Concept	Classification of the optris CTi LTeX sensing heads according to EN 60079-0/ EN 60079-11 (category of simple electrical devices) ²⁾
	Intrinsically safe by limitation of the energy with two zener barriers, type 9002/22-032-300-111 & 9002/11-137-029-001 (R. STAHL AG)
Scope of delivery	CTi LTeX – Sensor (optics 2:1, 15:1, 22:1) with cable length 3 m, 8 m or 15 m (selectable)
	Aluminum housing with mounting appliance for two zener barriers and CTi LTeX electronics
	2 zener barriers, type 9002/22-032-300-111 and 9002/11-137-029-001 (R. STAHL AG) ³⁾

¹⁾ Declaration of company R. Stahl AG

²⁾ Verification by the operator

³⁾ NOTE: The functionality and correct reading of the CTi LTeX sensor can only be guaranteed if the recommended barriers are used



Manufacturer's declaration for the CTi LTeX measurement system

To verify that the optris CTi LTeX sensing head is a simple electrical device according to EN 60079-11 item 5.7 we hereby confirm the following technical data:

• Inductance (available for the sensor cable only):

Inductance of the loops
min. 0.55 mH/ km max. 0.56 mH/ km

• In relation to a cable length of 15 m:

Inductance of the loops
min. 0.825 *10⁻³ mH max. 0.84 *10⁻³ mH


• Capacitance:

Capacitance of the sensor cable:
Capacitance lead/lead min. 16.5 nF/ km max. 17.9 nF/ km
Capacitance lead/rest min. 101.0 nF/ km max. 103.4 nF/ km

In relation to a cable length of 15 m:
Capacitance lead/lead min. 0.2475 nF max. 0.2685 nF
Capacitance lead/rest min. 1.515 nF max. 1.551 nF

Capacitance in the sensing head:
C1 = Ceramic SMD Capacitor 6.8 nF +/- 20 %
C2 = Ceramic SMD Capacitor 6.8 nF +/- 20 %

Connections

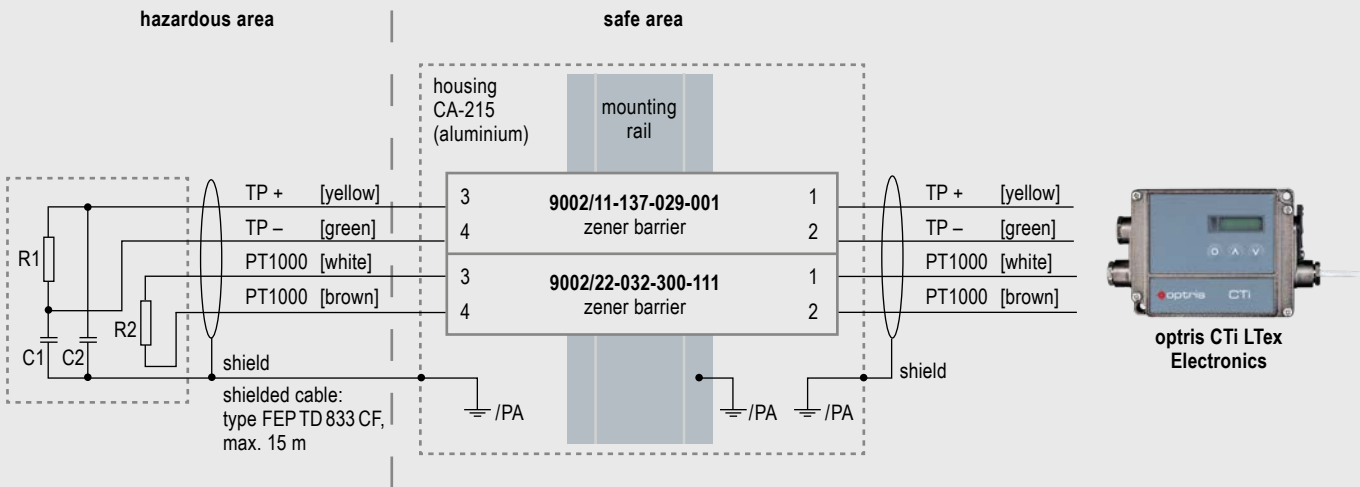

Dimensions in mm

