



## Compact spot finder IR camera for measurement through flames from 475 °C up to 1700 °C

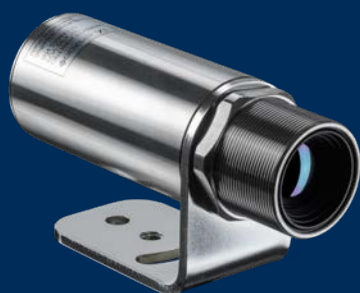

### Features:

- Industrial imager with 320 x 240 pixels
- Accurate temperature measurement through flames in the range from 475 °C to 1700 °C to monitor workpieces inside furnaces, to measure inside chemical reactors or to observe brick temperature in combustion chambers
- Small sized rugged camera with motorized focus and optional cooling and protection accessories for use under harsh environments
- Optional stackable industrial PIF with up to 9 analog or alarm outputs
- Software with extensive analysis features and web server capability included

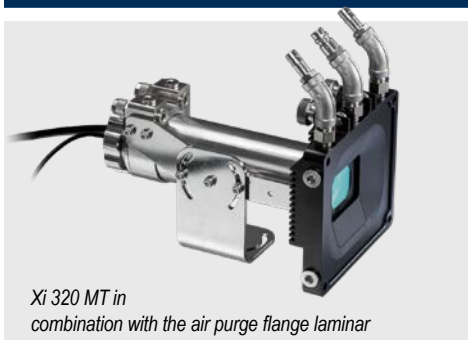


### Technical Specifications

Optical resolution	320 x 240 pixels
Detector	FPA, uncooled (12 µm pitch)
Spectral range	3.9 µm
Temperature range	475 ... 1700 °C
Optical resolution / Frame rate	<b>Ethernet:</b> 320 x 240 pixels @ 30 Hz <b>USB:</b> 320 x 240 pixels @ 5 Hz
Optics (FOV)	11° x 8° (f = 20 mm) 17° x 13° (f = 13 mm) 29° x 21° (f = 8 mm) 41° x 30° (f = 6 mm)
Focus	Manual motor focus
Optical resolution (D:S)	550:1 (11° optics)
Thermal sensitivity (NETD)	1 K @ 600 °C
Accuracy	±2 %
PC interface	Fast Ethernet / USB 2.0
Direct Output / Input	1x analog output (0/4-20 mA) / 1x input (analog or digital); electrically isolated
Process interface (PIF), industrial	3x analog outputs (0/4-20 mA or 0-10 V) and 3x alarm outputs (relais) / 3x inputs (analog or digital) / fail-safe (LED and relay) stackable up to 3 PIFs; electrically isolated
Cable length	<b>Ethernet:</b> 1 m (standard), 5 m, 10 m, 20 m (up to 100 m) <b>USB:</b> 1 m, 3 m, 5 m
Ambient temperature	0 °C ... 50 °C
Enclosure (size / rating)	Ø 36 mm x 100 mm (M30x1 thread) / IP 67 (NEMA 4)
Weight (without mounting bracket)	216 - 220 g, depending on lens
Shock <sup>1)</sup> / Vibration <sup>1)</sup>	IEC 60068-2-27 (25G and 50G) / IEC 60068-2-6 (sinus shaped), IEC 60068-2-64 (broadband noise)
Power supply	5 - 30 V DC / PoE / USB
Scope of supply	<ul style="list-style-type: none"> <li>• Process imager Xi 320 MT</li> <li>• Ethernet/ PoE cable (1 m)/ USB cable (1 m)</li> <li>• IN/ OUT cable incl. terminal block (1 m)</li> <li>• Mounting bracket with tripod thread, mounting nut</li> <li>• Software package optris PIX Connect</li> </ul>


<sup>1)</sup> For more details see operator's manual

# optris Xi 320 MT

## Practical example - Measuring object temperature using flames

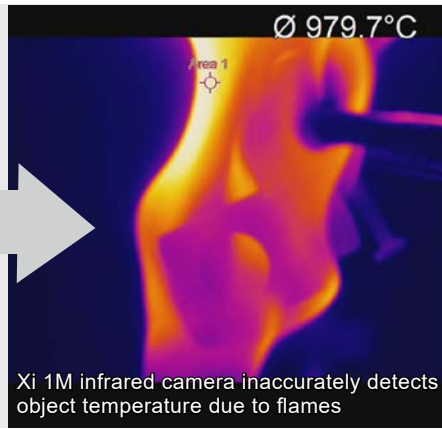


Xi 1M infrared camera inaccurately detects object temperature due to flames

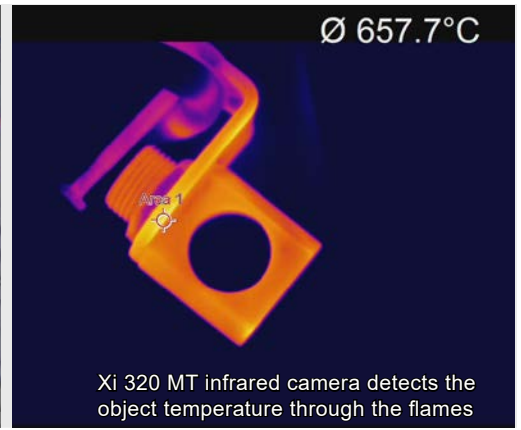


Xi 320 MT infrared camera detects the object temperature through the flames

## Dimensions in mm

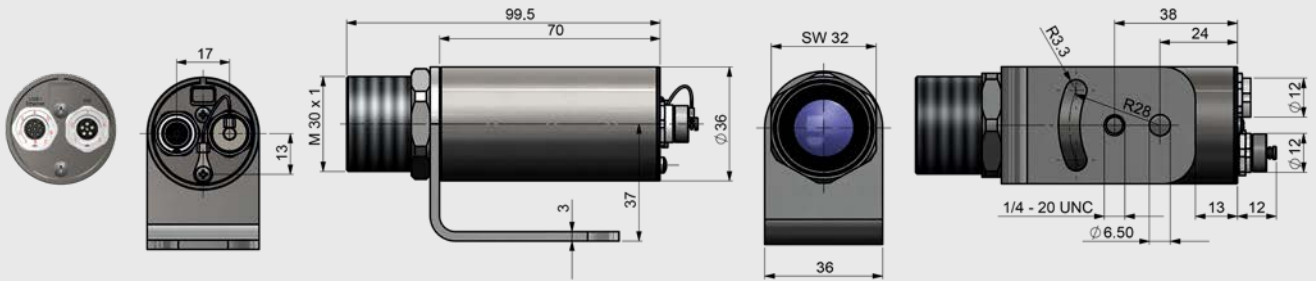


## Operation with PIX Connect software and 3 stackable PIFs

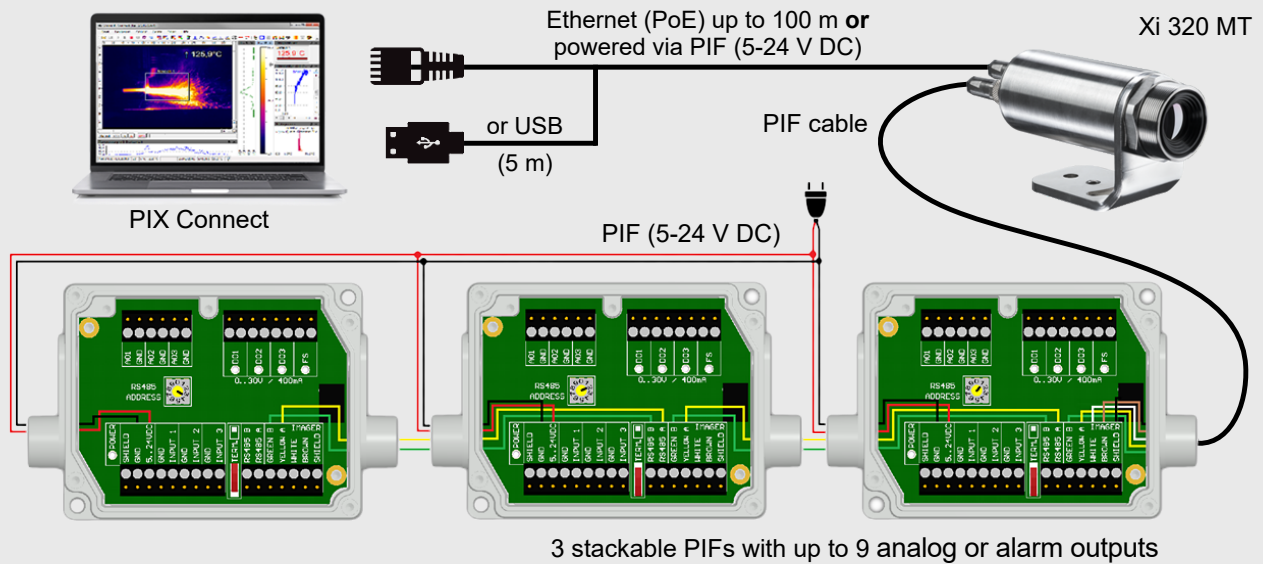

## Accessories

**ACXIMTAPL** (Air purge unit) + **ACXIAPLAB** (Mounting bracket)



**ACXIMW** (Water cooled housing)



**ACXISCBxx\*** (Shutter) + **ACXIAPLAB** (Mounting bracket)



\*) xx = for different cable lengths