

# BeanDevice® 2.4GHz Hi-Inc XRange

High performance wireless IIOT inclinometer sensor | tilt, inclination, slope monitoring

PRODUCT VIDEO



APPLICATION VIDEO



USER GUIDE



QUICK START



MECHANICAL DRAWING



STEP FILE



SmartSensor




2year  
Warranty

MADE IN GERMANY



207-132085

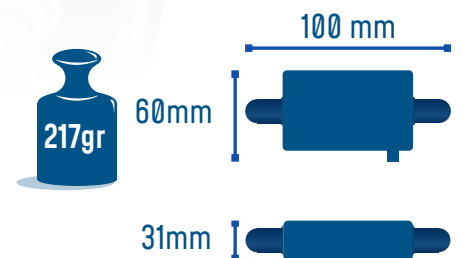

## MAIN FEATURES



• Wireless inclinometer (measurement range  $\pm 15^\circ, \pm 30^\circ$ )



• Time-synchronized wireless sensor networks ( $\pm 2.5$ ms of accuracy)



• Embedded data logger : up to 8 million data points (with events dating)



• Excellent radio link relying on the radio antenna diversity developed by Beanair®



• Waterproof IP67 casing (Nema 6)



• Integrated Lithium-Ion battery charger

**BeanDevice® 2.4GHz Hi-Inc XRange**

**APPLICATIONS**




Structural Health Monitoring

Test and Measurement



Condition Monitoring

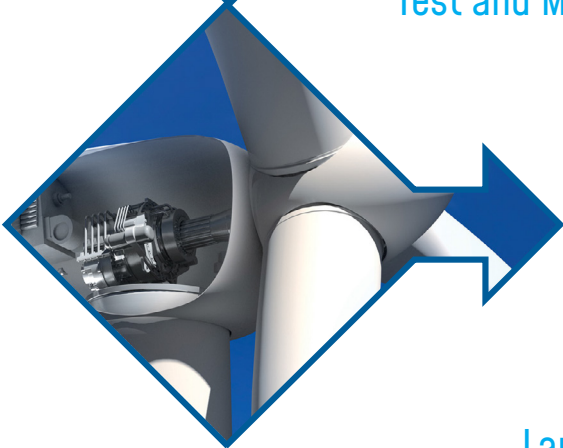

Land Surveying



For further information about bridge monitoring, please read the following applications note : AN\_RF\_002 – “Bridge monitoring with BeanAir® products”

**TIME-SYNCHRONIZED WIRELESS IIOT SENSORS**

TimeSync function brings time-synchronization over the Wireless IIOT Sensors Network ( $\pm 2.5\text{ms}$  of accuracy between each wireless IIOT sensor) and contributes to enhance user experience about correlation of remote sensing data and modal analysis.



# BeanDevice® 2.4GHz Hi-Inc XRange

## REMOTE CONFIGURATION & MONITORING

### BeanScape® 2.4GHz Basic

A powerful and versatile supervision software for managing your wireless sensors

The **BeanScape® 2.4GHz** allows the user to view and manage all the data transmitted by the **BeanDevice® 2.4GHz HI-INC XRange**. Thanks to the OTAC (Over-the-Air configuration) function, users can remotely configure the **BeanDevice® 2.4GHz HI-INC XRange**.

A versatile wireless inclinometer with different data acquisitions mode:

- **Low Duty Cycle Data Acquisition mode (LDCDA)** : Data acquisition is immediately transmitted by radio. Transmission frequency can be configured from the **BeanScape® 2.4GHz** software from 1s to 24h.
- **Survey Mode**: An alarm notification is transmitted when a threshold is reached. A powerful alarm management tool available on the **BeanScape® 2.4GHz** software allows the user to configure alarm threshold and to generate automatic alarm notification by email. A “heart beat” notification is frequently transmitted, and keeps the user informed about its current status.
- **Streaming Mode** : All measured data are transmitted by packet within a continuous flow at 60 samples per second maximum



### A seamless integration into a third-party supervision software

The **BeanScape® 2.4GHz Premium+** integrates an OPC DA server (Data Access). OPC DA is particularly well suited for real time measurement and data sharing.

Each data/measurement can be associated to a tag or its attributes and shared with one or many OPC clients.

**i** For further information about the different data acquisition modes:  
TN-RF-008 – “Data acquisition modes available on the BeanDevice®”

## ANTENNA DIVERSITY

While the vast majority of wireless IIOT sensors show their limits in harsh industrial environment, the **BeanDevice® 2.4GHz HI-INC XRange** integrates an innovative antenna diversity design, boosting the radio link quality in environments subject to random and diverse disturbances. Antenna Diversity improves both the quality and reliability of a wireless link by 30%



BeanDevice® 2.4GHz Hi-Inc XRange

EMBEDDED DATA LOGGER UP TO 8 MILLION DATA POINTS

The **BeanDevice® 2.4GHz HI-INC XRange** integrates an embedded datalogger, which can be used to log data when a Wireless IIOT Sensors can not be easily deployed on your site. All the data acquisition are stored on the embedded flash and then transmitted to the **BeanGateway® 2.4GHz** when a Wireless IIOT Sensors is established.

The data logger function is compatible with all the data acquisition mode available on the **BeanDevice® 2.4GHz HI-INC XRange** :

- LowDutyCycle Data Acquisition
- Survey
- Streaming packet

EXAMPLE : TILT MONITORING ON A BRIDGE

- In standalone operation, the **BeanDevice® 2.4GHz INC X-Range** stores all the measurements on its onboard datalogger. Thus, a direct connection with the **BeanGateway® 2.4GHz** is not needed.
- During the measurement campaign, all the acquired measurements are stored on datalogger.
- Data logs can be transmitted to the **BeanGateway® 2.4GHz** on request. Once a successful transmission is done, the user can choose to erase automatically the logs from the datalogger memory, so new ones can be stored.



For further information about data logger, please read the following technical note :  
TN-RF-007 – “BeanDevice® DataLogger User Guide ”

**TECHNICAL SPECIFICATIONS**

**PRODUCT REFERENCE**

**BND-2.4GHZ-HI-INC-MR-XR-PS-MO**

<b>MR - Measurement Range</b>	<b>PS - Power Supply</b>	<b>MO - Mounting Option</b>
15B : bi-axial ±15°	RB : Internal rechargeable battery	SCM - Screw Mounting Lid
30B : bi-axial ±30°	XT : External Power supply	MM - Magnetic Mounting Lid

**Example n°1:** BND-2.4GHZ-HI-INC-15B-XR-RB-SCM, High performance wireless bi-axis inclinometer with ±15° measurement range, internal rechargeable battery, Screw mounting

**Example n°2:** BND-2.4 GHZ-HI-INC-30M-XR-XT-MM High performance wireless mono-axis inclinometer with ±30° measurement range, external power supply, Magnet Mounting

**SENSOR SPECIFICATIONS**

Inclinometer Technology	Accurate and low power MEMS technology
Measurement resolution (Bandwidth 10 Hz)	0.001°
Noise density	0.0004 °/√Hz
Accuracy (full scale, @ 25°C)	±0.05° (±0.02° on customer request)
Offset temperature dependency	±0.002 °/°C
Sensitivity temperature dependency	±0.005 %/°C
Long term stability (@23°C)	< 0.004 °
Analog to Digital converter	16-bits, SAR architecture (Successive Approximation Register) with temperature compensation
Sensor frequency Response (-3 dB)	DC to 28 Hz
Noise spectral density DC to 100 Hz	0.0004 °/√Hz
Anti-aliasing filter	Butterworth 5th order filter – cut-off frequency : 1 Hz to 100 Hz remotely programmable (BeanScape®)

**OVER-THE-AIR CONFIGURATION (OTAC) PARAMETERS**

Data Acquisition mode (SPS = sample per second)	Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour Streaming Mode (not available on XT version, External power supply) Survey Mode: 1s to 24h
Sampling Rate (in streaming packet mode)	Minimum: 1 SPS Maximum: 60 SPS on each axis
Alarm Threshold	2 High level and 2 Low level
Programmable cut-off frequency (Anti-aliasing filter)	1– 100 Hz
Power Mode	Sleep Active (not available on XT version, External power supply)

**TECHNICAL SPECIFICATIONS**
**RF SPECIFICATIONS**

Wireless Protocol Stack	Ultra-Power and license-free 2.4Ghz radio technology (IEEE 802.15.4E)
WSN Topology	Point-to-Point / Star
Data rate	250 Kbits/s
RF Characteristics	ISM 2.4GHz – 16 Channels. Antenna diversity designed by Beanair®
TX Power	+18 dBm
Receiver Sensitivity	-104dBm
Maximum Radio Range	650m (Line of Sight) , 30-100m (Non Line of Sight)
Antenna	Omnidirectional radome antenna with antenna diversity Gain : 3 dBi Waterproof IP67

**EMBEDDED DATA LOGGER**

Storage capacity	up to 8 millions data points
Wireless data downloading	20 minutes to download the full memory (average time)

**TIMESYNC FUNCTION : CLOCK SYNCHRONIZATION OVER THE WIRELESS IIOT SENSORS (WSN)**

Clock synchronization accuracy	±2.5 ms (at 25°C)
Crystal specifications	Tolerance ±10ppm, stability ±10ppm

**ENVIRONMENTAL AND MECHANICAL**

Casing	Aluminum & Waterproof casing · Dimensions in mm (LxWxH): 100 x 60 x 31 (without antennas and mounting eyelet) · Weight (with internal battery) : 217g (screw mounting) and 245g (magnetic mounting)
IP   NEMA Rating	IP67   Nema 6
Base plate	· Aluminum black anodized AL 7075 with rugged three-point-mounting · Screw Mounting Option: the device should be mounted on a flat and smooth surface with 3 screws, dimension M5. Mounting torque 5 ±1Nm · Magnetic Mounting Option: the device should be mounted on a steel surface.
Shock resistance	150g during 50 ms
Operating Temperature	RB : Internal rechargeable battery -20 °C to +65 °C during battery discharge 0 to 45°C during battery charge XT : External Power Supply -40 °C to +75 °C during battery discharge
Norms & Radio Certifications	· CE Labelling Directive R&TTE (Radio) ETSI EN 300 328 · FCC (North America) · ARIB STD-T66 Ver 3.6 ROHS - Directive 2002/95/EC

**TECHNICAL SPECIFICATIONS**

**POWER SUPPLY**


Integrated battery charger	Integrated Lithium-ion battery charger with high precision attery monitoring : · Overvoltage Protection, Overcurrent/Short-Circuit Protection, Undervoltage Protection · Battery Temperature monitoring
Current consumption @3.3V	· During data acquisition : 30 to 40 mA · During Radio transmission : 80 mA @ 18 dBm · During sleeping : < 38 µA
External power supply	8-28VDC
Rechargeable battery	High density Lithium-Ion rechargeable battery with a capacity of 950 mAh

**OPTION(S)**

External Power Supply	Wall plug-in, Switchmode power Supply 12V @ 1,25A with sealed M8 Plug (IP67/Nema 6) <a href="#">Ref: M8-PWR-12V</a>
Solar Panel Kit (compatible with External Power Supply version only)	High efficiency solar panel with Solar charging controller and Lead-acid battery <a href="#">Ref: X-SOL-5W-M8-2M</a>
Bracket Mounting	90° Bracket for BeanDevice (Xrange smartsensor) with 4 x M5 screws + Locknut <a href="#">Ref: SMART-BRACK-MNT</a>
External Primary Cell in a Waterproof IP67 Casing	Exernal Primary cell mounted in a IP67 aluminum Alloy casing: IP67 Battery Holder Lithium-thionyl chloride primary cell (Li-SOCl2) 6,5 Ah <a href="#">Ref: PRIM-XTENDER</a>
M8 extension cable for external power supply	Molded cable with M8-3pins male plug Material: PVC with shield protection IP Rating : IP67   Nema 6 Cable length: 2 meters , <a href="#">Ref: CBL-M8-2M</a> Cable length : 5 meters, <a href="#">Ref: CBL-M8-5M</a> Cable length: 10 meters, <a href="#">Ref: CBL-M8-10M</a>
Calibration certificate	Calibration certificate provided by Beanair GmbH A static calibration method is used on a granite surface plate DIN876

**BeanDevice® 2.4GHz Hi-Inc XRange**

**BEANDEVICE® 2.4GHZ HI-INC XRANGE FRONT VIEW**

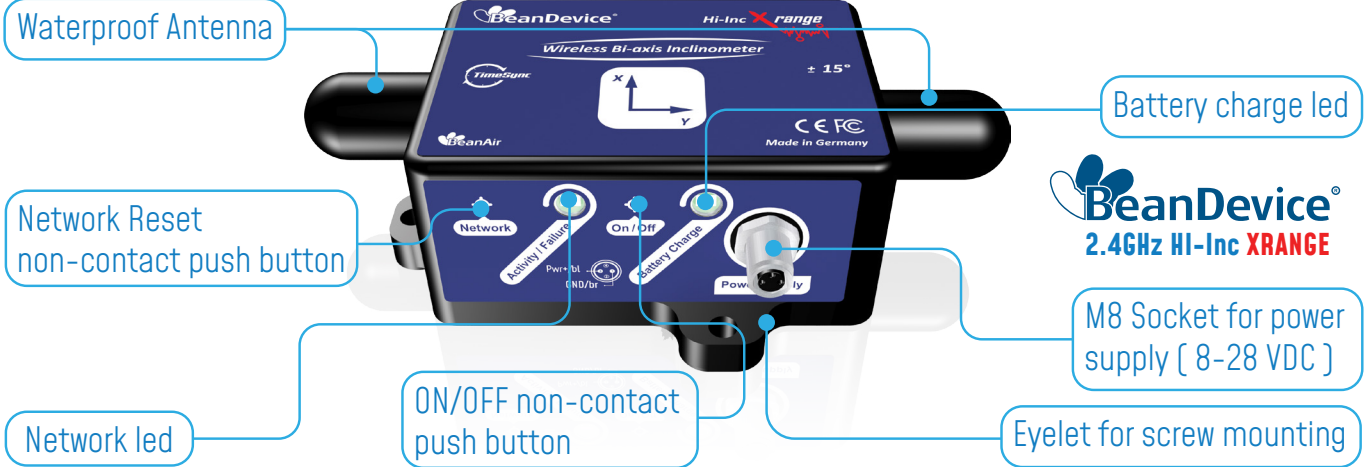

Product specifications are subject to change without notice.  
Contact Beanair for latest specifications.

**OPTIONS AND ACCESSORIES**

**AC/DC Power supply with M8 Plug**

- Ref:M8-PWR-12V
- Wall plug-in power supply, Output: 12VDC, M8-3Pins plug
  - AC Power plug: Europe/UK Northamerica /China/Australia
  - Waterproof - IP67



**Bracket**



**Magnetic Mounting**

**Mounting Option**

- Bracket
- Screws Mounting
- Magnetic Mounting



**Screws Mounting**

**Molded Cable with M8 plug**

- Ref:CBL-M8-2M [cable length : 2 meters]
- CBL-M8-5M [cable length : 5 meters]
  - CBL-M8-10M [cable length : 10 meters]



**X-SOLAR**

(SOLAR Charging Controller)  
High efficiency Solar Panel with Solar Charging Controller and Lead-acid battery



CONTACT US

Headquarter:

BeanAir GmbH  
Wolfener Straße 32 - 34  
12681 Berlin

Email:

info@beanair.com

Phone number:

+49 30 98366680




[www.industrial-wsn.com](http://www.industrial-wsn.com)



[www.facebook.com/BeanAir](https://www.facebook.com/BeanAir)



[www.beanair.com](http://www.beanair.com)



[www.youtube.com/user/BeanairSensors](https://www.youtube.com/user/BeanairSensors)



[www.twitter.com/beanair](https://www.twitter.com/beanair)

