

BeanDevice® WILOW® AX-3D

ULP (Ultra-Low-Power) Wifi accelerometer with built-in data logger

PRODUCT VIDEO



USER GUIDE



QUICK START



MECHANICAL DRAWING





STEP FILE



MQTT TOOLKET FOR IOT  
SENSOR



MADE IN GERMANY

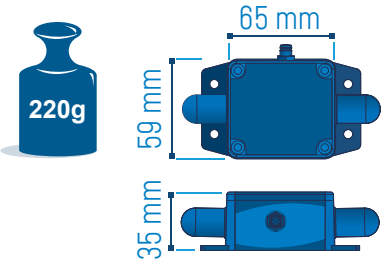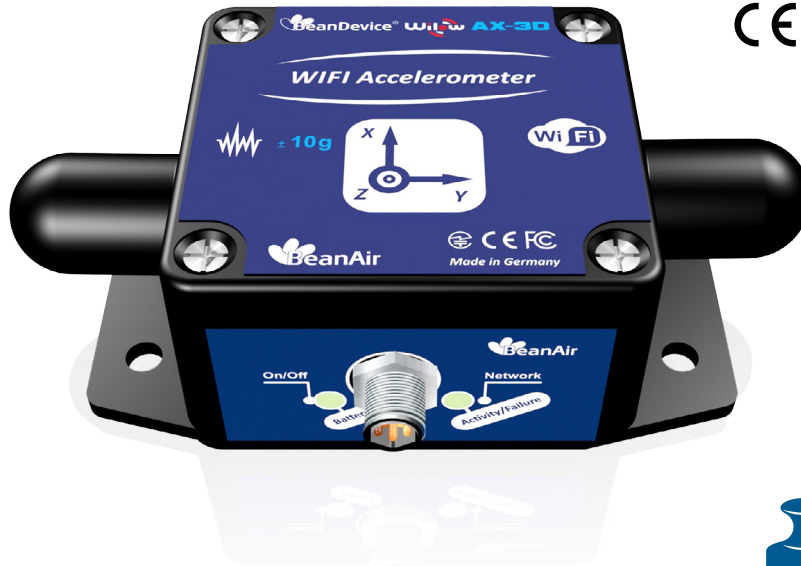

MAIN FEATURES

- ULP (Ultra Low Power) Wifi technology
- Embedded data logger: up to 5 million data points (with events dating)
- High precision accelerometer (measurement range  $\pm 2g$  or  $\pm 10g$ ) with FFT, PPV (Peak-Particle Velocity) and Amplitude calculations
- SSD (Smart Shock Detection) allows to trigger data acquisition on a shock detection
- Waterproof (IP67/NEMA 6) and Rugged aluminum casing,
- Over the Air Firmware upgrade via WIFI
- Virtual Inclinometer
- USB 2.0 link for device configuration (including firmware upgrade)
- Store and Forward+: lossless data transmission
- Excellent radio link relying on the radio antenna diversity designed by Beanair®
- IIOT Ready: integrates MQTT data exchange, an open-source Internet of Things (IOT) protocol
- Smart and flexible power supply:
  - Internal lithium-polymer rechargeable battery (780 mAh)
  - External 5VDC power supply compatible with both USB power and solar energy harvesting

BeanDevice® WILOW® AX-3D

APPLICATIONS



Test and Measurement



Structural Health Monitoring

Ground Vibration Monitoring



IIOT



MQTT

Ready for Industrial Internet of Things ?



Third - party WIFI Bridge

Third - party Wifi Access Point



BeanDevice

WIFI Access Point



Wilow AX-3D

**BeanDevice® WILLOW® AX-3D**

**AN OPEN-STANDARD & INDUSTRIAL WIFI TECHNOLOGY**

- ULP (Ultra Low power) Wifi – IEEE 802.11 b/g/n
- Lower total cost of ownership-works with existing access points
- Large installed base and consequent broad-based familiarity with configuration, use and troubleshooting at the physical and link layers
- Easy provisioning & IT friendly: our ULP wifi sensors use IP-over-Ethernet networking environment

**A RELIABLE WIFI TECHNOLOGY THANKS TO OUR “STORE AND FORWARD+” FUNCTION**



The store and forward technique works by storing the message transmitted by the **BeanDevice® Wilow** (wireless DAQ/sensor) to a Wifi access point/ Wifi receiver. If the message is not received due to a network disruption, it will be retransmitted on the next transmission cycle. This technique allows to bring a lossless data transmission.

User can also enable the Hard real-time option; i.e. the message must be received by the Wifi Access Point/Wifi Receiver within the confines of a stringent deadline. It is automatically deleted if it failed to reach its destination within the allotted time span

**TECHNICAL SPECIFICATIONS**

**PRODUCT REFERENCE**

**BND-WILOW-AX-3D-MR-MO**

**MR - Measurement Range:**

2: ±2g measurement range

10: ±10g measurement range

**Example 1: BND-WILOW-AX-3D-10G-BR**

ULP WIFI Accelerometer with ±10g range with 90° Mounting bracket

**Example 2: BND-WILOW-AX-3D-2G-M**

ULP WIFI Accelerometer with ±2g range with magnetic mounting

**Example 3: BND-WILOW-AX-3D-10G**

ULP WIFI accelerometer with ±10g range

**MO - Mounting option**

**BR - 90° Mounting bracket**

**M - Magnetic Mounting**

**TECHNICAL SPECIFICATIONS**
**ACCELEROMETER SPECIFICATIONS**

Accelerometer technology	High precision accelerometer based on MEMS technology
Accelerometer measurement range	two versions: $\pm 2g$ and $\pm 10g$
Sensitivity	$\pm 2g$ Version : 660 mV/g $\pm 10g$ version: 200 mV/g
Typical non-linearity	$\pm 0.1\%$ FS
Analog to Digital converter	24-bit delta-sigma with temperature compensation Synchronous measurement channel
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	2 kSPS per axis
Noise spectral density	$\pm 2g$ Version : 45 $\mu g/\sqrt{Hz}$ $\pm 10g$ version: 100 $\mu g/\sqrt{Hz}$
Zero-g Offset Variation from RT over Temp	$\pm 2g$ Version : $\pm 0.2$ mg/ $^{\circ}C$ $\pm 10g$ version: $\pm 0.1$ mg/ $^{\circ}C$
Sensitivity Variation from RT over Temp	$\pm 2g$ Version : $\pm 0.01$ %/ $^{\circ}C$ (XY), $\pm 0.02$ %/ $^{\circ}C$ (Z) $\pm 10g$ version: $\pm 0.01$ %/ $^{\circ}C$
Offset Ratiometric Error	$\pm 2g$ Version : 4mg $\pm 10g$ version: $\pm 0.2\%$ (XY), $\pm 0.1\%$ (Z)
Sensitivity Ratiometric Error	$\pm 2g$ Version : $\pm 1.25$ % (X-Y), $\pm 0.2$ % (Z) $\pm 10g$ Version : $\pm 1.6\%$ (X-Y), $\pm 0.2$ % (Z)
Cross Axis Sensitivity	0,02
Onboard temperature sensor	Range $-40^{\circ}C$ to $+65^{\circ}C$ , accuracy $\pm 1^{\circ}C$

**SHOCK SENSOR SPECIFICATIONS**

Shock Sensor technology	MEMS technology
Shock sensor range	$\pm 2g/\pm 4g/\pm 6g/\pm 8g/\pm 16g$ dynamically selectable from the BeanScape software
Sensitivity	$\pm 2g$ range: 0.06 mg/digit $\pm 4g$ range: 0.12 mg/digit $\pm 6g$ range: 0.06 mg/digit $\pm 8g$ range: 0.12 mg/digit $\pm 16g$ range: 0.12 mg/digit
Typical non-linearity	$\pm 0.15\%$ on the FS
Analog to Digital converter	12-bits with temperature compensation
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	1.6 kSPS per axis
Noise spectral density	150 $\mu g/\sqrt{Hz}$
Sensitivity change Vs temperature	$\pm 0,01\%$ / $^{\circ}C$
Zero-g level change vs temperature (max delta from 25 $^{\circ}C$ )	$\pm 0.5$ mg/ $^{\circ}C$
Typical zero-g level offset accuracy	$\pm 40$ mg
Anti-aliasing filter	Butterworth 2th order filter

## TECHNICAL SPECIFICATIONS

### REMOTE CONFIGURATION PARAMETERS

Data Acquisition mode (SPS = sample per second)	Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour Alarm -Low duty cycle: 1s to 24 hour Streaming mode : 100 SPS by default Streaming with event-trigger (SET) Mode : 100 SPS by default
Sampling Rate (in streaming mode)	Minimum: 1 SPS Maximum: 3 kSPS per axis
Alarm Threshold	High and Low Levels alarms
Power Mode	Sleep & Active power modes

### RF SPECIFICATIONS

Wireless Protocol Stack	IEEE 802.11 b/g/n
WSN Topology	Point-to-Point / Star / Cluster-Tree
Crypto Engine	WPA2, WPS2
Data rate	UDP: 16 Mbps TCP: 13 Mbps
RF Characteristics	ISM 2.4GHz. Antenna diversity designed by Beanair®
TX Power	18 dBm @ 1 DSSS 14.5 dBm @ 54 OFDM
Rx Sensitivity	-95.7 dBm @1 DSSS -74.0 dBm @54 OFDM
Maximum Radio Range	200m (L.O.S), Radio range be extended by adding Wifi Bridge/Repeater
Antenna	Antenna diversity : 2 omnidirectional antenna with a gain of 2,8 dBi

### USB SPECIFICATIONS

USB standard	USB 2.0
Data Rate	Full speed operation(12MB/s)
Related functions	- Firmware update - Wifi & system configuration"

### EMBEDDED DATA LOGGER

Storage Capacity	up to 5 million data points
Wireless data downloading	3 minutes to download the full memory (average time)

**TECHNICAL SPECIFICATIONS**

**ENVIRONMENTAL AND MECHANICAL**

Casing	Aluminum casing Dimensions in mm (LxWxH):35x59x65 mm without antenna & eyelet, Weight (with internal battery, w/o mounting option) : 220g
IP   NEMA Rating	Ip67   Nema 6
Shock resistance	100g during 50 ms
Operating Temperature	-40 °C to +65 °C
Norms & Radio Certifications	CE Labelling Directive R&TTE (Radio) ETSI EN 300 328(Europe) FCC (North America) ARIB STD-T66 Ver. 3.6 (Japan) ROHS - Directive 2002/95/EC

**POWER SUPPLY**

Rechargeable battery	High density Lithium-Ion rechargeable battery with a capacity of 780 mAh
Integrated battery charger	Integrated Lithium-ion battery charger with high precision battery monitoring
Current consumption @ 3.3V	During data acquisition : 20 to 30 mA During Radio transmission : • 1 DSSS - 278 mA • 54 OFDM - 229 mA During sleep power mode : < 100 µA
External power supply	Two power supplies available: • USB Power supply 5V • 5 VDC compatible with solar energy harvesting

**INCLUDED ACCESSORIES**

M8 plastic cap	1pcs, <a href="#">Ref: WL-PC</a>
M8 to USB cable	1pcs M8-5pins to USB Cable, 2 meters length. <a href="#">Ref:WL-CBL-M8-USB-2M</a>
Magnet for power on/power off	1pcs Magnet. <a href="#">Ref: WL-MGN</a>
Wall mounting kit	4 pcs M5 screws+ Locknut. <a href="#">Ref:WL-SCMKIT</a>




TECHNICAL SPECIFICATIONS

OPTIONS (NOT INCLUDED)

Power-supply	Wall plug-in, Switchmode power Supply 12V @ 1.25A with USB plug
M8 Cable	M8-5Pins Cable , cable length : - 2 meters. Ref: <a href="#">WL-CBL-M8-2M</a> - 5 meters. Ref: <a href="#">WL-CBL-M8-5M</a>
WIFI AP/Repeater (wifi link extension)	Wireless AP/Repeater with an integrated N-Type RF connector + High Gain Antenna Casing : Polycarbonate Waterproof casing Dimensions: 190 x 46 mm Weight: 196 g Antenna Connector: N-Type Connector (male) Power Supply: 24V, 0.5A PoE Adapter (included) Power Method: Passive Power over Ethernet Max. Power Consumption: 6 Watts Operating Temperature: -40 to 80° C Shock and Vibration: ETSI300-019-1.4 Ref: <a href="#">WL-AP-UBIQ-TIT-7DBI</a> for 7dBi Antenna Ref: <a href="#">WL-AP-UBIQ-TIT-9DBI</a> for 9dBi Antenna
Solar Panel	Polycrystalline Solar Panel for BeanDevice® Wilow® power supply Maximum Power : 3W Optimum operating Voltage: 12 VDC Dimension: 235 mm x 135 mm x 17mm Protection Frame: Aluminum Frame , Waterproof IP67 Length : 2 meters (Ref: <a href="#">WL-SLP-3W-2M</a> ) or 5 meters (Ref: <a href="#">WL-SLP-3W-5M</a> ) with M8 plug for a direct to connection to the BeanDevice® Wilow® Country of origin: solar panel from China, assembled and tested in Germany
Calibration certificate	Calibration certificate linked to national and international standards (DRAKKS) (Ref: <a href="#">WL-CERT-CAL</a> )

BEANDEVICE® WILOW® FRONT VIEW

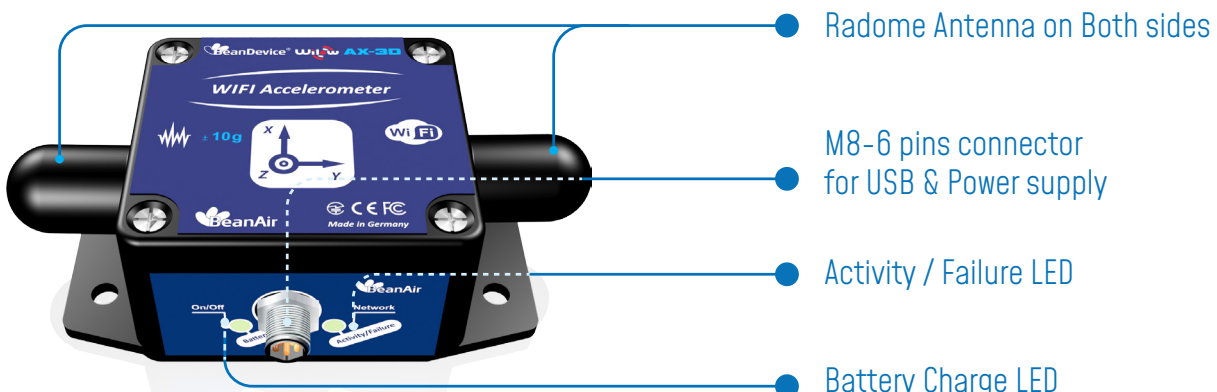

**BeanDevice® WILLOW® AX-3D**

**MECHANICAL MOUNTING OPTIONS**

By default, the **BeanDevice® Wilow®** comes with a screw mounting lid.

Two other mounting options are available:

- Magnetic mounting, add the extension -M on your product reference
- 90° bracket, add the extension -BR on your product reference



Mechanical Mounting Options Video



**CONTACT US**

Headquarter:

Email:

Phone number:

BeanAir GmbH  
Wolfener Straße 32 - 34  
12681 Berlin

[info@beanair.com](mailto:info@beanair.com)

+49 30 98366680



[www.industrial-wsn.com](http://www.industrial-wsn.com)



[www.beanair.com](http://www.beanair.com)



[www.youtube.com/user/BeanairSensors](https://www.youtube.com/user/BeanairSensors)



[www.facebook.com/BeanAir](https://www.facebook.com/BeanAir)



[www.twitter.com/beanair](https://www.twitter.com/beanair)

