

Non-contact temperature measurement of thin-film plastic materials from 0 °C to 710 °C



Features:

- Accurate temperature measurement of thin-film plastic materials like PET, PU, PTFE, PA
- Two-piece design with easy accessible programming keys and LCD backlit display
- Built-in USB interface for simple sensor setup via mobile phone or PC
- Selectable analog outputs: 0/4 – 20 mA, 0 – 5 V, 0 – 10 V, thermocouple type K
- Optional EtherNet/IP, Profinet, Ethernet TCP/IP / Modbus TCP, Modbus RTU, RS485, RS232 interface or relay outputs (2 x optically isolated)
- Easy and flexible exchange of sensing heads

General specifications

Environmental rating	IP 65 (NEMA-4)
Operating temperature range ¹⁾	-20 °C ... 85 °C (sensing head) -20 °C ... 85 °C (electronics)
Storage temperature	-40 °C ... 85 °C (sensing head) -40 °C ... 85 °C (electronics)
Operating air humidity range	10–95 %, non condensing
Vibration (sensor)	IEC 60068-2-6 (sinus shaped) IEC 60068-2-64 (broadband noise)
Shock (sensor)	IEC 60068-2-27 (25G and 50G)
Weight	200 g (sensing head incl. massive housing) / 420 g (electronics)

Electrical Specifications

Output / analog (2x)	0 / 4 – 20 mA, 0 – 5 / 10 V, thermocouple K, alarm
Output / alarm	24 V / 50 mA (open collector)
Relay outputs (optional)	2 x 60 V DC / 42 V AC _{RMS} ; 0.4 A; optically isolated
Digital Interfaces	built-in USB-interface, Optional: EtherNet/IP, Profinet, Ethernet TCP/IP / Modbus TCP, Modbus RTU, RS485, RS232 or relay outputs (2 x optically isolated)
Output impedances	mA max. 500 Ω (with 8 – 36 V DC) mV min. 100 kΩ load impedance
I/O Pins (3x)	flexible programming as in- or output: external emissivity adjustment, ambient temperature compensation, uncommitted value, trigger (reset of holdfunctions), alarm output (open collector 24 V / 50 mA)
Cable length	3 m (standard), 8 m, 15 m
Power supply	8 - 30 V DC / 1.2W

Measurement specifications

Measuring Temperature range (scalable via programming keys or software / App)	0 °C ... 710 °C
Spectral range	7.9 μm
Optical resolution (90% energy)	10:1
Measurement uncertainty ^{2), 4), 6), 7)}	±1.5 °C or ±1%
Repeatability ^{3), 4), 5), 7)}	±0.22 K
Temperature resolution (display)	0.1 K
NETD (typically) ^{3), 4), 5), 7)}	45 mK
Response time (90% energy)	150 ms
Emissivity / Gain (adjustable via programming keys or software / App)	0.05–1.100
Transmissivity / Gain (adjustable via programming keys or software / App)	0.05–1.100
Signal processing (parameter adjustable via programming keys or software/ App)	Peak hold, valley hold, average; extended hold functions with threshold and hysteresis
Software / App	Optris CompactPlus Connect / IRmobile App

¹⁾ The LCD display capacity may be limited at ambient temperatures below 0 °C

²⁾ whichever is greater

³⁾ Response time = 200 ms (90%)

⁴⁾ ε = 1.000


⁵⁾ Tobj = 50 °C

⁶⁾ Response time = 1 s (90%)

⁷⁾ at ambient temp. (23 ± 5) °C

optris CTi P7

Optical specifications - Standart Focus (SF)

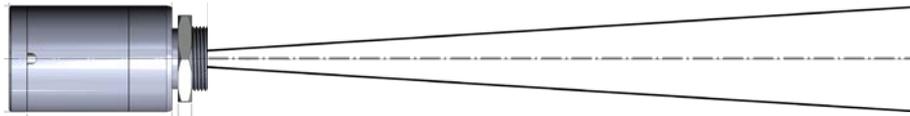


D:S	Optical values											
	0	100	200	300	400	500	600	700	800	900	1000	Distance (mm)
10:1	6.5	14.9	23.3	31.6	40.0	51.6	63.3	74.9	86.5	98.1	109.8	Spotsize (mm)




More optical data: <https://optris.com/optris-calculator/>

Dimensions (in mm)

Electronics

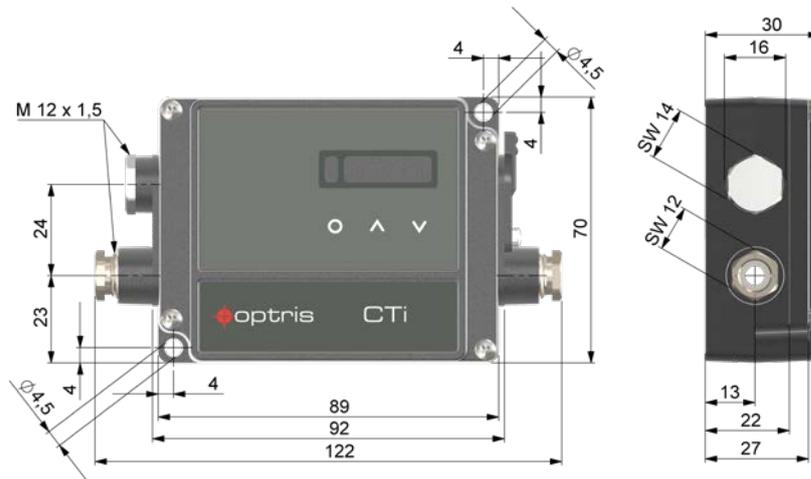

Sensing head with Massive housing

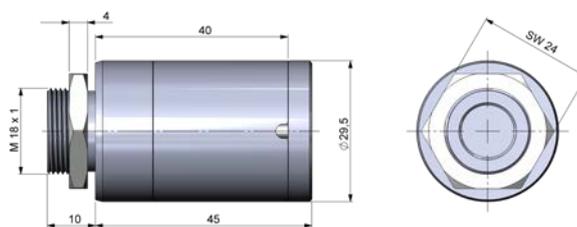

Software / App



<https://optris.com/software>

